


4 CH Digital Video System

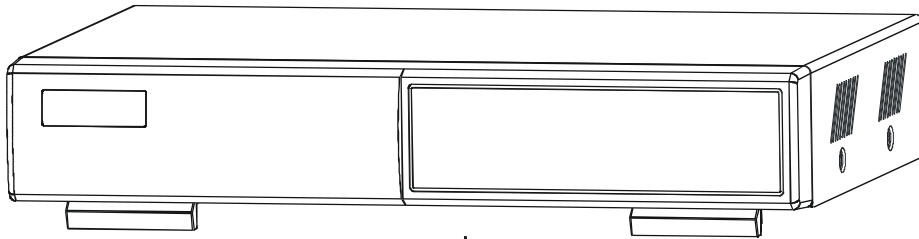


User's Manual

Please read this instructions thoroughly before operation and keep the manual in a safe place for further reference.

WARNING

All the safety and operating instructions should be read before operation. The improper operation may cause permanent damage.

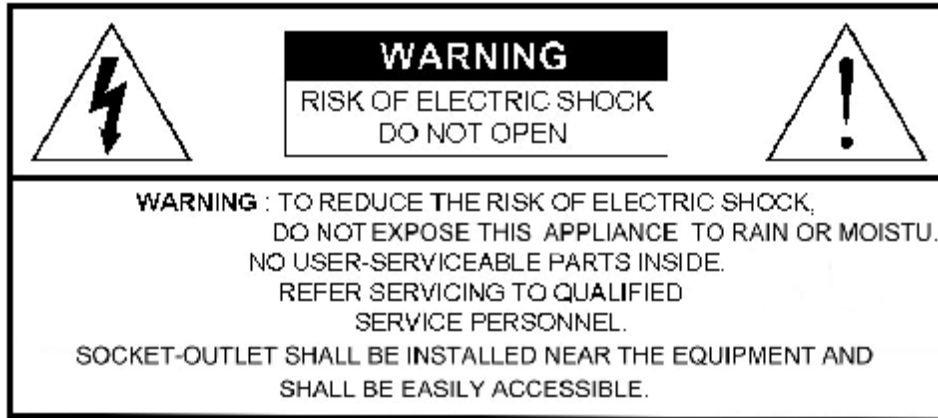

- This adaptor is only for this machine. Do not use it for other electronic products or it may damage other products.
- Please lift and place this equipment gently.
- Do not expose this equipment from direct sunlight and keep it away from sources of intense heat.
- Do not use this equipment near water or in contact with water.
- Avoid dusty or humid place.
- Do not switch the Power On & Off within short period of time (within 3 seconds).
- Do not block the ventilation holes at the top and bottom of the unit.
- Do not attempt to service this equipment by yourself.
- Installation should be made by qualified service personnel.
- Do not try to retrieve the HDD data by PC.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance-(servicing) instructions in the literature accompanying the appliance.

TABLE OF CONTENTS

What do you get ?

- FEATURES 3
- PACKAGE CONTENT 3

Before Operation

- INSTALLATION GUIDE 4
- FRONT PANEL 5
- REAR PANEL 7

Basic Operation

- GETTING STARTED..... 8
- OPERATION..... 8

Detailed Menu Setup

- MAIN MENU 10
- MENU OPTIONS 10

Advanced Operation

- OPERATION OPTIONS 18
- KEY LOCK 18
- RS-232 PROTOCOL 19
- TROUBLE SHOOTING..... 19
- SPECIFICATIONS..... 20

- APPENDIX #1 – INSTALL THE HDD 21

- APPENDIX #2 – REPLACE THE HDD 21

- APPENDIX #3 – PIN CONFIGURATIONS 22

- APPENDIX #4 – RECORDING SPEED..... 24

- APPENDIX #5 – NETWORK APPLICATION..... 25


What do you get ?

FEATURES

DVS Features

- Support Manual / Timer / Alarm / Motion recording mode.
- Wavelet compression format replaces Time-Lapse VCR + Multiplexer / Quad
- On Screen Display and Remote Control via Video Server & PC
- Picture-in-picture (PIP) and Picture-on-Picture (POP) function in live
- Alarm input & output function
- Video loss detected on each channel
- Multiplexer & Quad recording mode switching
- Recording rate up to full size 25 fields/sec. or Quad size 100 IPS (PAL).
- Support 1 HDD, IDE TYPE (over 500 GB)
- Multiple quick search by date/time, alarm, full list
- Security password protection
- RS-232, RS-485 communication protocol

PACKAGE CONTENT




Digital Video System



User's Manual



Accessories pack



Accessories pack



Power Adapter and Cord

Warning:

1. Please check the package to make sure that you receive the complete components shown above.
2. This adaptor is DC19V 2A. User can find the adaptor for replacement at a computer shop if the adaptor is broken.


Before Operation

INSTALLATION GUIDE

1. Connect cameras and monitor to the DVS.
2. Shown below is an example of connecting the DVS to your existing Observation System.
3. Install HDD (The compatible HDD Brands are listed in the following table.)

Please refer to page 19. Appendix #1 for installation instructions.


*The HDD must be installed before turning on the DVS. If HDD is not installed, the DVS would function as a 4 CH multiplexer.

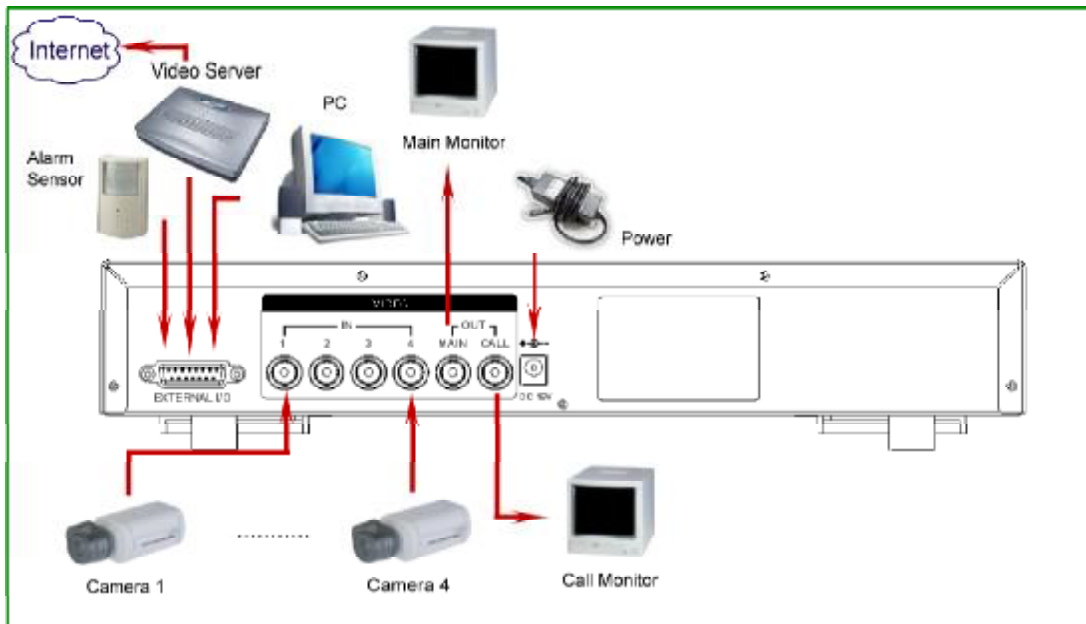







COMPATIBLE HARD DISK MODELS

Manufacturer	Model	Capacity	Rotation
HITACHI	Deskstar 180 GXP (120 GB)	120GB	7200 rpm
HITACHI	Deskstar 7K250, HDS722516VLAT20	160GB	7200 rpm
HITACHI	Deskstar 7K250, HDS722525VLAT80	250GB	7200 rpm
IBM	Deskstar 120GXP (80GB)	80GB	7200 rpm
IBM	Deskstar 120GXP (120GB)	120GB	7200 rpm
Maxtor	DiamondMax 536DX(60GB) 4W060H4	60GB	5400 rpm
Maxtor	DiamondMax Plus 9	80GB	7200 rpm
Maxtor	DiamondMax Plus 9, Model#6Y120L	120GB	7200 rpm
Maxtor	DiamondMax Plus 9, Model#6Y160L0	160GB	7200 rpm
Maxtor	MaxLine Plus II , Model#7Y250P0	250GB	7200 rpm
Seagate	Barracuda ATA IV, ST380021A	80GB	7200 rpm
Seagate	Barracuda ATA V, ST3120023A	120GB	7200 rpm
Seagate	Barracuda 7200.7 Plus, ST3160023A	160GB	7200 rpm
Western Digital	Caviar WD1200BB-00CAA1	120GB	7200 rpm
Western Digital	Caviar WD2000BB-00DWA0	200GB	7200 rpm
Western Digital	CaviarSE WD2500JB	250GB	7200 rpm

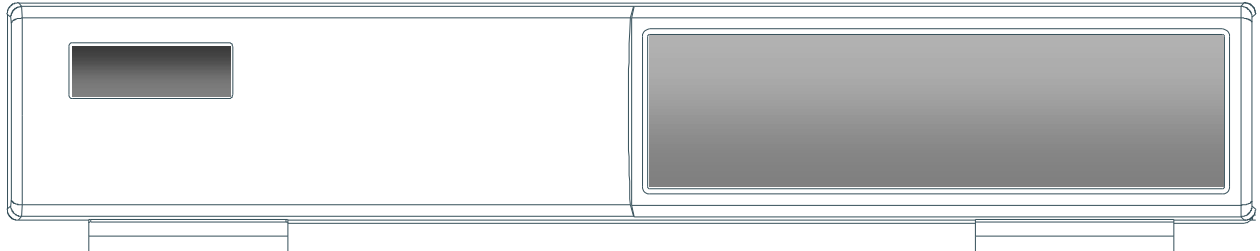
FRONT PANEL



<p>LED LIGHT</p>	<p>The LED Light is ON under following condition.</p> <ul style="list-style-type: none"> • HDD : HDD is reading or recording. • HDD Full : HDD is full • ALARM : To turn off the ALARM LED light. Please refer to page.13 and set the ALARM mode as OFF. • TIMER : When Timer is Enabled • PLAY : Playing mode • REC : Recording mode
<p>MENU</p>	<p>Press MENU to enter main menu.</p>
<p>ENTER</p>	<p>Press ENTER for confirmation</p>
<p>SEARCH</p>	<p>Press SEARCH for searching recorded video.</p>
<p> / POP</p>	<p>Press “  ” button for Picture on Picture screen.</p>
<p> /+ Picture in Picture</p>	<p>PIP: Press “PIP” button for Picture in Picture screen.</p> <p>+ : Press “+ ” button can change the setting in the menu.</p>
<p> /- 4-channel display mode</p>	<p> : Press “  ” button for 4 CH display modes</p> <p>— : Press “— ” button can change the setting in the menu.</p>
<p>SLOW</p>	<p>To slow down the speed of playing mode.</p>

<p>FF / ►</p>	<ul style="list-style-type: none"> • FF : Play video fast forward. (Press FF button again to adjust speed from 1, 2, 4, 8, 16, 32 times) • ► : Under setup mode, it works as Right button.
<p>REW / ◀</p>	<ul style="list-style-type: none"> • REW : Play video fast backward. (Press REW button again to adjust speed as 1, 2, 4, 8, 16, 32 times) • ◀ : Under setup mode, it works as Left button.
<p>STOP / ▼</p>	<ul style="list-style-type: none"> • STOP : Under DVS Record / Play mode, it can stop the action. • ▼ : Under setup mode, it works as Down button.
<p>PAUSE / ▲</p>	<ul style="list-style-type: none"> • Pause : Under DVS play mode, it can pause the action. • ▲ : Under setup mode, it works as Up button.
<p>PLAY</p>	<p>Press PLAY to playback recorded video.</p>
<p>REC</p>	<p>Press REC to start recording.</p>
<p>CAMERA SELECT (1-4)</p>	<p>Press the Camera Select (1-4) to select the channel.</p>
<p>ENTER + SEARCH</p>	<p>During the LIVE or PLAY mode, press both “ENTER” and “SEARCH” buttons to switch the “NORMAL” or “SHARPNESS” display.</p>

REAR PANEL

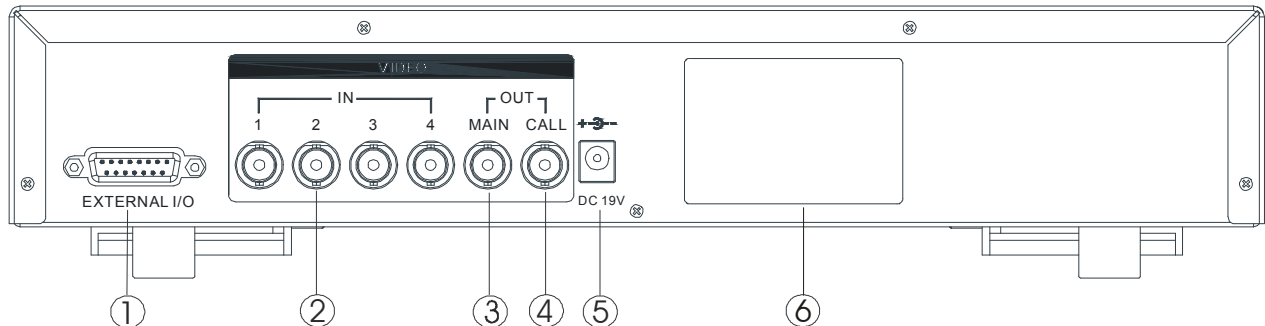

1. EXTERNAL I/O

- Controlled remotely by an external device or control system like Video Web Server.
- Alarm input, external I / O expansion.

2. VIDEO INPUT (1-4)

Connect to video source, such as camera.

3. MAIN

Connect to Main monitor.

4. CALL

Connect to CALL monitor. Show the Switch Display.

When alarm is triggered, the call monitor will show the triggered channel according to the system setting.

5. POWER

Please use the provided power cord.

Warning:

1. This adaptor is only for this machine. Do not use it for other electronic product or it may damage other products.
2. This adaptor is DC19V 2A. User can find the adaptor for replacement at a computer shop if the adaptor is broken.

6. FAN

For ventilation.

Note: If the ambient temperature is high or ambient ventilation is bad, we suggest to install a fan on the rear panel.

Basic Operation

GETTING STARTED

Before using the DVS, please have a HDD installed ready, or it will function as 4 CH multiplexer (refer to Appendix #1 for installation the HDD).

1. Connect the AC power cord and plug into an electrical outlet. The POWER LED will turn into orange color, and other red LED indicators will turn ON. It takes approximately 5 to 15 seconds to boot the system with the message : “ HDD Detecting ”. Once successfully connected, the POWER LED will change to green color, and the Alarm LED will be ON.
2. Before operating the DVS, set the system time first. (refer to page.10).


NOTE : 1. If the HDD is not installed correctly or not installed, the “HDD not found” message will appear for 3 seconds and then return to 4 CH Multiplexer display mode.

2. **To switch the system, pull out the AC power cord, before you reconnect the power, press “FF” to NTSC system or “REW” to PAL system and then reconnect the AC power cord, the DVS will auto-detect the system.**

OPERATION

RECORDING


The DVS offers 3 recording modes. Refer P.13 for advanced setting of recording speed and resolution. Under the recording status, if power is off accidentally, recorded video will still be stored in the HDD. DVS will return to original recording setting after power restores again.

While you press “REC” button, on the screen, you will find the date, time, recording type, the available HDD space in GB and the letter “” represents the recording mode.
(OW : HDD Overwrite)


NOTE : 1. When the HDD is full under O/W Recording mode, previous recorded files will be overwritten without further warning notices.

2. **If the HDD space is only 5 GB left, it will display “5 GB” on the up-right screen in orange color, and it will buzz for seconds; so as in 4GB, 3GB, 2GB and 1GB. If the O/W Recording mode (NOTE 1) is on, it won't have the warning buzzer.** (OW : HDD Overwrite)


There are 4 recording modes: Alarm, Motion, Timer and Manual Recording.




1. ALARM RECORDING

DVR is triggered by an alarm input.  symbol will be shown on the triggered channel. (refer to page13)


2. MOTION TRIGGER RECORDING

Recording is triggered by motion detection.  symbol will be shown on the triggered channel. (refer to page14)

3. TIMER RECORDING

Recording is scheduled by a Timer. It will indicate by the symbol  . (refer to page11)

4. MANUAL RECORDING

Recording is initiated manually by pressing the REC button. Symbol  will be shown.

PLAY BACK

Press "PLAY" button, the DVS will show the last recording.

1. FAST FORWARD (F.F.) & FAST REWIND (F.R.)

You can increase the speed of Fast Forward and Rewind on the DVS.

In the Play mode, press "▶" once to get 2X speed forward and press twice to get 4X speed, ... and the maximum speed can reach 32X.

Press "◀" once to get 1X speed rewind and press twice to get 2X speed, ... and the maximum speed can reach 32X.

2. SLOW FORWARD (S.F.) & SLOW REWIND (S.R.)

You can also slow down the speed of Forward and Rewind on the DVS.

In the Play mode, press the SLOW button and you will enter Slow mode.

Press "SLOW" once to get 1/2X speed forward and press "▶" to get 1/4X speed, ... and the slowest speed can reach 1/32X.

Press "◀" once to get 1/2X speed rewind and press twice to get 1/4X speed, ... and the slowest speed can reach 1/32X.

3. PAUSE

You can pause the playback and the image will be displayed on the screen.

4. STOP

Press "STOP" button under any circumstance, DVS will return to live monitoring mode.

5. IMAGE JOG DIAL

It will allow you to manually view video frame-by-frame, one image at a time.

While in PLAY mode, press "PAUSE", it will pause the screen.

Press "▶" button advances the frozen screen one image forward.

Press "◀" button moves back one image.

6. SHARPNESS

During the LIVE or PLAY mode, press both "ENTER" and "SEARCH" buttons to switch the "NORMAL" or "SHARPNESS" display.

CAMERA SELECT (1-4)


Press Camera Select (1-4) to select the camera to display in full screen.

Detailed Menu Setup

MAIN MENU

There are 11 options available in the Main Menu:

- TIMER** ----- Program Timer Recording
- CAMERA** ----- Camera Setup
- RECORD** ----- Recording Mode Setup
- ALARM** ----- Alarm Setup
- DWELL** ----- Dwell time Setup
- PIP** ----- Picture in Picture Setup
- MOTION** ----- Motion Detection Setup
- DISPLAY** ----- Display Mode Setup
- REMOTE** ----- Remote Control Setup
- USER** ----- User Password Setup
- SYSTEM** ----- System Setup
- EVENT** ----- Event List

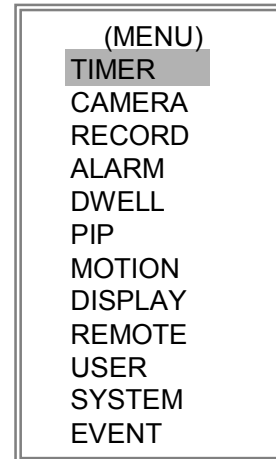

Outlined below are the buttons used for Menu setting :

- “▲” and “▼” : Scroll up and down within a menu option
- “◀” and “▶” : Scroll sideways within a menu option that has been selected
- “+” and “-” : Increase and decrease the number or change values when an option is selected and is blinking
- **ENTER** : Select a submenu / an option under a submenu for browsing / modification
- **MENU** : Complete modification of a menu option; exit a menu

MENU OPTIONS

SYSTEM

1. BUZZER

Set the BUZZ “ON”, it will buzz by event occurrence.

2. EXT ALARM

To set the EXT ALARM. It will be triggered by event occurrence when the setting is ON.

3. VLOSS ALARM


To set the VLOSS ALARM. When the setting is “ON”, the alarm will start by the setting of Buzzer, EXT alarm or Alarm Duration.

4. KEY MUTE

To set the KEY MUTE. When the setting is “YES”, there will be no sound when you press any key.

5. HDD OVERWRITE

To set the HDD OVERWRITE. When the HDD is full under O/W recording mode, previously recorded files will be overwritten without further warning notices when the HDD OVERWRITE is ON.

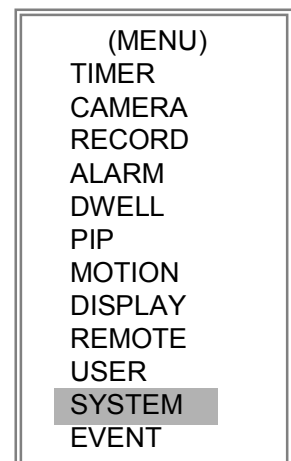

6. MESSAGE LATCH

To select whether the DVS messages will disappear after 10 seconds or remain on screen. NO is the default setting which the messages will disappear after 10 sec.

NOTE : Video loss, and Alarm messages will be shown the same as Alarm Duration time.

7. DATE DISPLAY

To set the date Y/M/D, M/D/Y, D/M/Y and OFF on monitor or not.

8. DATE

To set the date on the DVS.

9. TIME

To set the time on the DVS.

10. CLEAR HDD

Delete all the contents of the HDD. When you choose "YES" on this option, press "ENTER" and you will be prompted with the question shown: Press "→" to clear HDD or press "←" to cancel.

11. SYSTEM RESET

Reset all system to the factory default settings. Select "YES" and press "ENTER" button.

(SYSTEM)	
BUZZER	ON
EXT ALARM	ON
VLOSS ALARM	ON
KEY MUTE	YES
HDD OVERWRITE	YES
MESSAGE LATCH	YES
DATE DISPLAY	D/M/Y
DATE	26-DEC-2003 [FRI]
TIME	22:55:34
CLEAR HDD	YES
SYSTEM RESET	YES

TIMER

1. DAY

Select the day, or days of the week (Mon-Fri / Sat-Sun / Daily) that you wish to schedule the DVS to automatically record.

NOTE :

1. Change the date by "+" and "-" buttons.
2. If you have selected the date and **Timer** recording set from that specific day to a new day, then the **Timer** Recording Schedule will be set as whole week. For specific date of **Timer** Recording Schedule, it is not recommended to set Ending Time over 23:59. For example: If you set Timer Schedule Day as Sunday, and START from 11:30, but End on 00:20, then Recording Timer Schedule is set as from every Sunday's 11:30 to next Sunday's 00:20. If you only want to set Recording Timer Schedule from every Sunday 11:30 to Monday 00:20, then you should set Recording Timer Schedule as Sunday from 11:30 to 23:59, and Monday from 00:00 to 00:20.
3. It is not suggested that users press "STOP" button or restart the system during setting time. In doing so, the recording will stop, and users can resume recording by pressing "ENTER" + "REC".

(MENU)
TIMER
CAMERA
RECORD
ALARM
DWELL
PIP
MOTION
DISPLAY
REMOTE
USER
SYSTEM
EVENT

2. START

Set the time to start the recording.

3. END

Set the time to end the recording.

4. IPS (IMAGES PER SECOND)

NTSC—30、15、8、4、2、1

PAL—25、12、6、3、2、1

(TIMER)					
DAY	START	END	IPS	QLT	MODE
DAILY	01:00	22:00	30	BEST	Q-FR
OFF	00:00	00:00	30	BEST	Q-FI
OFF	00:00	00:00	30	BEST	Q-FI
OFF	00:00	00:00	30	BEST	Q-FR
OFF	00:00	00:00	30	BEST	Q-FR
OFF	00:00	00:00	30	BEST	Q-FR
OFF	00:00	00:00	30	BEST	MUX
OFF	00:00	00:00	30	BEST	Q-FI
TIMER ENABLE : YES					

5. QUALITY

Select the quality of recording image: **BEST, HIGH, NORM and BASE.**

6. MODE

There are three recording mode settings :

QUAD-FRAME, QUAD-FIELD, MULTIPLEX.

NOTE: To ensure the best recording quality, we don't suggest the users switch a different recording mode during the period of recording.

1ST	00--05	06--11	12--17	18--23
MON	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
TUE	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
WED	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
THU	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
FRI	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
SAT	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
SUN	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
2ND	00--05	06--11	12--17	18--23
MON	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
TUE	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
WED	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
THU	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
FRI	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
SAT	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐
SUN	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐	☐☐☐☐☐☐

7. TIMER ENABLE

When TIMER ENABLE is "YES", press "menu" button, you can see the timer diagram according to your setting.

CAMERA

1. TITLE

Assign a title to each camera. Initially each title is the camera's number.
(Max: 8 characters)

2. ALARM

Select LOW / OFF / HIGH for alarm polarity. The default value is LOW.

(CAMERA)						
TITLE	ALARM	REC	BR	CT	CL	HUE
CAMERA01	LOW	ON	18	15	15	18
CAMERA02	OFF	OFF	18	15	15	18
CAMERA03	HIGH	OFF	18	15	15	18
CAMERA04	HIGH	ON	18	15	15	18

(MENU)
TIMER
CAMERA
RECORD
ALARM
DWELL
PIP
MOTION
DISPLAY
REMOTE
USER
SYSTEM
EVENT

3. REC (RECORD)

Set up which channel you want to record.

ON : when alarm input is triggered, DVS will record alarming channel more frequently.

For example : when CH01 is triggered, the record method will become 1-2-1-3-1-4....

OFF : DVS will not record.

4. BR (BRIGHTNESS)

Adjust the brightness of each channel. The level is from 0 to 63.

5. CT (CONTRAST)

Adjust the contrast of each channel. The level is from 0 to 63.

6. CL (COLOR)

Adjust the color of each channel. The level is from 0 to 63.

7. HUE (HUE)

Adjust the hue of each channel. The level is from 0 to 63.

RECORD

1. RECORD IPS

Select the recording speed. The options are as following :

NTSC—30、15、8、4、2、1

PAL—25、12、6、3、2、1

2. QUALITY

There are four quality settings : BEST, HIGH, NORMAL, BASIC.

NOTE : The relationship of Record time, IPS and Record quality, please refer to page.24 Recording Speed.

3. RECORD MODE

There are three recording settings : QUAD-FRAME, QUAD-FIELD, MULTIPLEX.

(MENU)
TIMER
CAMERA
RECORD
ALARM
DWELL
PIP
MOTION
DISPLAY
REMOTE
USER
SYSTEM
EVENT

(RECORD)
RECORD IPS 30
QUALITY NORMAL
RECORD MODE QUAD-FRAME

ALARM

1. ALARM ENABLE

Alarm will be triggered by event occurrence when the setting is "YES".

2. ALARM DURATION

Set the reaction time of the alarm mode responds to a buzzer.

Default setting is 10 Sec. Options are 10 Sec, 15 Sec, 20 Sec, 30 Sec, 1 MIN, 2 MIN, 3 MIN, 5 MIN, 10 MIN, 15 MIN, 30 MIN, ALWAYS, AUTO.

NOTE : 1. Video loss, and Alarm messages will be shown the same as Alarm Duration time.

2. When the setting is AUTO, the alarm duration time is according to the setting of the external alarm device.

3. During ALARM DURATION'S setting time, users can restart ALARM function by pressing both "ENTER" + "STOP" buttons.

(MENU)
TIMER
CAMERA
RECORD
ALARM
DWELL
PIP
MOTION
DISPLAY
REMOTE
USER
SYSTEM
EVENT

3. REC IPS

Select the images per second of recording during an ALARM.
The options are as following:

- NTSC—30、15、8、4、2、1
- PAL—25、12、6、3、2、1

4. QUALITY

There are four recording quality settings during an ALARM :
BASIC, BEST, HIGH, NORMAL.

5. RECORD MODE

There are three recording settings : QUAD-FRAME, QUAD-FIELD,
MULTIPLEX.

(ALARM)	
ALARM ENABLE	YES
ALARM DURATION	15 MIN
RECORD IPS	30
QUALITY	NORMAL
RECORD MODE	QUAD-FRAME

DWELL

1. NORM

To set up the DWELL time period that each channel auto sequentially
shows on call monitor. The level is from 1 to 15 Sec or OFF.

2. ALARM

To set up the DWELL time period when alarm input is triggered.
The level is from 1 to 15 Sec or OFF.

(MENU)	
TIMER	
CAMERA	
RECORD	
ALARM	
DWELL	
PIP	

(DWELL)	
NORM	ALARM
CAM1	01 01
CAM2	01 01
CAM3	01 01
CAM4	01 01

PIP

1. FULL SCREEN

To set up the full screen background picture display.

2. PIP SCREEN

To set up the picture with a 1/9 size screen "insert".

3. POSITION

There are six position settings : D/L, D/M, D/R, U/L, U/M, U/R.

(MENU)	
TIMER	
CAMERA	
RECORD	
ALARM	
DWELL	
PIP	
MOTION	
DISPLAY	

(PIP)	
FULL SCREEN	CAM 1
PIP SCREEN	CAM 2
POSITION	D/R

MOTION

1. SEN (SENSITIVITY)

Sets the sensitivity of the pixel-based Motion Detection feature from 1 to 99.
The highest sensitivity setting is 01, the lowest sensitivity setting is 99.
The default setting is 70.

2. MD-NUM (MOTION DETECTION NUMBER)

Sets the number of targets in which Motion must occur in order to trigger an Alarm
(from 1-99 target areas).

Note: MD-NUM cannot be less than the number of targets set in the AREA.

3. RE (REFERENCE)

Set the Reference image to which the current screen is compared (from 1-99).
For example, the value 64 would compare the current image to the 64th previous
screen image. The higher value may increase the sensitivity.

4. DET (DETECTION)

The motion detection on each channel can be turned to
ON or OFF individually.

(MENU)	
TIMER	
CAMERA	
RECORD	
ALARM	
DWELL	
PIP	
MOTION	
DISPLAY	
REMOTE	
USER	
SYSTEM	
EVENT	

5. AREA

Press the ENTER button on this option to set the Pixel-based Motion Detection Area for each channel. Red targets represent where the target is (Figure 1-1). Green targets represent the Motion Detection Area (Figure 1-2), and Purple targets represent motion currently taking place (Figure 1-3). After stop detecting, the color of target will be green (Figure 1-4).

To modify the Motion Detection Area, use the following controls:



: turn the selected target ON/OFF.

▲▼◀▶: navigates between targets

— : turns all targets on the screen ON/OFF

+ : turn all targets in the selected row ON/OFF

Note: When the “DET” (DETECTION) setting is “ON”, you must set the motion detection AREA or it won’t be triggered.

(MOTION)					
	SEN	MD-NUM	RE	DET	AREA
CAM1	70	03	64	ON	AREA
CAM2	70	03	64	OFF	AREA
CAM3	70	03	64	ON	AREA
CAM4	70	03	64	ON	AREA

MOTION RECORD : ON					
DAY	START	END			
DAILY	00 : 00	00 : 00			

Figure 1-1

MOTION DETECTION SETUP

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1																
2																
3																
4																
5						■										
6																
7																
8																
9																
11																
12																

Figure 1-2

MOTION DETECTION SETTING — ROW SETUP

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1																
2					■	■	■									
3					■	■	■									
4					■	■	■									
5	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6																
7																
8																
9																
11																
12																

Figure 1-3

MOTION DETECTION TRIGGERED-TURN INTO PURPLE

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1																
2						■	■	■								
3						■	■	■								
4						■	■	■								
5	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6																
7																
8																
9																
11																
12																

Figure 1-4

BACK TO MOTION DETECTION SETTING



	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1																
2						■	■	■								
3						■	■	■								
4						■	■	■								
5	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6																
7																
8																
9																
11																
12																


6. MOTION RECORD

When the DET setting is “ON”, you can set up the MOTION RECORD function,

1. Select “ON” to set up the motion trigger recording: It can automatically switch to Record Mode. The motion detection will change the scanning sequence and show on the monitor.

NOTE: The trigger recording time will depend on ALARM DURATION mode setting (Please refer to page.13 for ALARM DURATION) and it will record from the last trigger time. For example, when the alarm duration setting is 1 min, the recording time is from 9:00:00 to 9:01:00. If the motion detection triggered again at 9:00:40, the triggered recording time will from 9:00:00 to 9:00:40 and 9:00:40 to 9:01:40. The total recording time is 00:01:40.

For example : If the motion is detected on Camera #1, its recording & scanning sequence will be more frequently. The sequence will be as 1st, 2nd, 1st, 3rd, 1st, ... 4th. And channel 1 will show  on the screen. If 2nd camera and 3rd camera both motion detection are activated, they will be scanning as 2nd, 3rd, 1st, 2nd, 3rd, 4th, 2nd, 3rd, 1st, 2nd, 3rd, 4th ... and vice versa. And CH2 & CH3 will show  for a period of time which is same as Alarm Duration time.

2. Select "OFF": The screen still shows  and if it is in record mode, the motion detection will change the scanning sequence.

7. DAY / START / END

To setup the DAY and the START/ END time for motion trigger recording timer setting.

DISPLAY

1. TITLE DISPLAY

To set the title shown on monitor or not.

2. OSD COLOR

Select the OSD (On Screen Display) color. The options are YELLOW, GREEN, CYAN, BLUE, PINK, GRAY, WHITE, RED.

3. LOSS SCREEN

Retain the last picture or select the LOSS SCREEN color. The options are GREEN, BLACK, BLUE and RETAIN.

4. TIME POSITION

To set the OSD POSITION shown on monitor. The options are NORMAL or CENTER.

(MENU)
TIMER
CAMERA
RECORD
ALARM
DWELL
PIP
MOTION
DISPLAY
REMOTE
USER
SYSTEM
EVENT

(DISPLAY)	
TITLE DISPLAY	YES
OSD COLOR	YELLOW
LOSS SCREEN	GREEN
TIME POSITION	NORMAL

REMOTE

1. REMOTE MODE

Set the remote mode for connection with computer via RS-232 or RS-485. (Please refer to page. 19 for RS-232& RS-485 Remote Protocol).

2. BAUD RATE

Set the remote protocol transmitting baud rate. Available options are 115200, 57600, 19200, 9600, 4800, 3600, 2400, 1200.

3. ID

To control different DVS by setting remote protocol. ID number can be set from 000 to 255.

(REMOTE)	
REMOTE MODE	RS-485
BAUD RATE	9600
ID	255

(MENU)
TIMER
CAMERA
RECORD
ALARM
DWELL
PIP
MOTION
DISPLAY
REMOTE
USER
SYSTEM
EVENT

USER

1. USER

To set up the user account for controlling. It allows 8 users setting.

Supervisor – Control all the functions.

Other Users – View all functions except the menu setting.

2. PASSWORD

To set the security password for each account. The maximum length of user's password is 4 characters.

NOTE: To switch to different USER, press "ENTER" + "MENU" buttons to "KEY LOCK" and then enter the different user's password to UNLOCK.

(MENU)
 TIMER
 CAMERA
 RECORD
 ALARM
 DWELL
 PIP
 MOTION
 DISPLAY
 REMOTE
 USER
 SYSTEM
 EVENT

(USER)	
	PASSWORD
SUPERVISOR	0000
USER 1	0000
USER 2	0000
USER 3	0000
USER 4	0000
USER 5	0000
USER 6	0000
USER 7	0000

EVENT

A single page can display 16 recorded events. Press "◀" or "▶" to change the pages or press "▲" + "▼" to CLEAR the EVENT record.

DISK FULL: HDD is full

PWR REST : Power restored

M-HD REMS: HDD removal

M-HD REPL: HDD replace

M-HD ERR : HDD error

M-HD WARM: HDD warning

K UNLOCKS: Key is unlock

DMA ERROR: DMA error(Direct Memory Access)

C1 VLOSS : Video loss on Ch1

C2 ALARM : Channel 2 has been triggered by external I/O alarm

SYSTEM ERROR: System fail

POWER RESTORE : Power restored

(MENU)
 TIMER
 CAMERA
 RECORD
 ALARM
 DWELL
 PIP
 MOTION
 DISPLAY
 REMOTE
 USER
 SYSTEM
 EVENT

C1 VLOSS	26-DEC-2002	03:00:00
C2 ALARM	26-DEC-2002	03:00:00
K UNLOCKS	26-DEC-2002	03:00:00
M-HD ERR	26-DEC-2002	03:00:00
M-HD WARM	26-DEC-2002	03:00:00
PWR REST	26-DEC-2002	03:00:00
DMA ERROR	26-DEC-2002	03:00:00
M-HD REPL	26-DEC-2002	03:00:00

↑ + ↓ : CLEAR

Advanced Operation

OPERATION OPTIONS

VIDEO LOSS

Screen will display "VLOSS" in the center of display picture, if the video input is not connected properly.




SEARCH

1. LAST RECORD

Play the last recorded piece of video.

2. FULL LIST

List all recorded video on the HDD which sorted by time.

-  : Manual Recording
-  : Alarm Recording
-  : Timer Recording
- M : Storage in Master HDD
- S : Storage in Slave HDD

NOTE: It will display different color on each record list mention above.

3. ALARM LIST

List all recorded video triggered by Alarm.


NOTE : If there are no Alarm in the record, the screen will display "EMPTY".

4. MOTION LIST

List all motion triggered records.

5. TIME SEARCH

Find video recorded on a specific date that is entered.

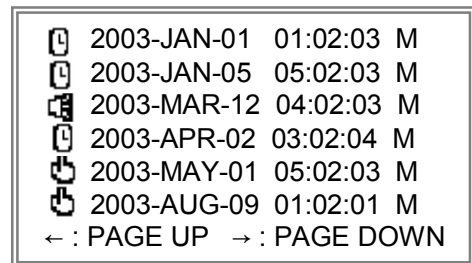

KEY LOCK

For advanced security, you can "Lock" the buttons on your DVS. Key-Lock prevents other people from using the system.

Press ENTER and MENU at the same time to enable Key Lock.

Press ENTER and MENU at the same time and key in password (Default : 0000), then press "ENTER" to disable Key Lock.

NOTE: To switch to different USER, press "ENTER" + "MENU" buttons to "KEY LOCK" and then enter the different user's password to UNLOCK.

RS-232 REMOTE PROTOCOL

You can use the PC keyboard to simulate DVS keypad.

DATA: REMOTE PROTOCOL using 8 bit data · 1 start bit · 1 stop bit

FUNCTION	CODE	ASCII	FUNCTION	CODE	ASCII
KEY_MENU	0x4D	M	KEY_PLAY	0x50	P
KEY_SEARCH	0x73	s	KEY_DOWN	0x4E	N
KEY_ENTER	0x0D	ENTER	KEY_RIGHT	0x52	R
KEY_QUAD	0x51	Q	KEY_KEY_LOCK	0x4B	K
KEY_POP	0x5A	Z	KEY_CH1	0x31	1
KEY_PIP	0x70	p	KEY_CH2	0x32	2
KEY_SLOW	0x53	S	KEY_CH3	0x33	3
KEY_REC	0x72	r	KEY_CH4	0x34	4
KEY_LEFT	0x4C	L	TIMER REC PROCEED	0X54	T
KEY_UP	0x55	U			

TROUBLESHOOTING

When malfunction occurs, it may not be serious and can be corrected easily. The following table describes the most common problems with their solutions. Please read thoroughly before calling your DVS dealer.

PROBLEM	SOLUTION
No power	<ul style="list-style-type: none"> ● Check power cord connections. ● Confirm that there is power at the outlet.
Not working when press any button	<ul style="list-style-type: none"> ● Check if it is under Key Lock mode. ● Press "MENU" & "ENTER" to exist Key Lock mode.
No recorded video	<ul style="list-style-type: none"> ● Check if the HDD is installed properly.
Timer Record enable does not working	<ul style="list-style-type: none"> ● Check if the Time Enable is set to YES
No live video	<ul style="list-style-type: none"> ● Check camera video cable and connections. ● Check monitor video cable and connections. ● Confirm that the camera has power. ● Check camera lens setting.
NTSC & PAL System switch	To switch the system, press "FF" to NTSC system and "REW" to PAL system. (Refer to Page 8 "Getting Started").

SPECIFICATIONS

Video format	NTSC/EIA or PAL/CCIR
Hard disk storage	IDE type, UDMA 66, supported 500 GB HDD
Record mode	Manual / Timer / Alarm / Motion
Camera Input Signal	Composite video signal 1 Vp-p 75Ω BNC, 4 channels
Main Monitor Output	Composite video signal 1 Vp-p 75Ω BNC
Call Monitor Output	Composite video signal 1 Vp-p 75Ω BNC
Video Loss Detection	Yes
Refresh Rate	Up to 240 fields/sec. for NTSC / 200 fields/sec. for PAL
Recording Rate	Multiplex: Up to 30 fields/sec. for NTSC / 25 fields/sec. for PAL Quad-field: Up to 120 fields/sec. for NTSC / 100 fields/sec. for PAL * Quad-frame: Up to 240 fields/sec. for NTSC / 200 fields/sec. for PAL**
Dwell Time	Programmable (1~15 Sec)
Picture in Picture	Yes (Movable)
Key Lock	Yes
Camera Title	8 letters
Video Adjustable	Hue/ Color/ Contrast/ Brightness Adjustable
Alarm Input	TTL input, Hi (5V), Low (GND)
Alarm Output	COM./N.O/N.C
Remote Control	RS-232 or RS-485
Time Display Format	YY/MM/DD, DD/MM/YY, MM/DD/YY, OFF
Power Source	DC 19V
Power Consumption	<32W
Operation Temperature	10 ~ 40°C
RS-232C / RS-485 (bps)	115200、57600、19200、9600、4800、3600、2400、1200
Dimension (mm)	343(W) x 223(L) x 59(H)
Net Weight	1.5 kgs


• Specifications are subject to change without notice.

*NTSC: 4CH x 30IPS = 120 fields/sec, PAL: 4CH x 25IPS = 100 fields/sec

**NTSC: 4CH x 60IPS = 240 fields/sec,PAL: 4CH x 50IPS= 200 fields/sec

APPENDIX #1 – INSTALL THE HDD

Follow these steps carefully in order to ensure correct installation.

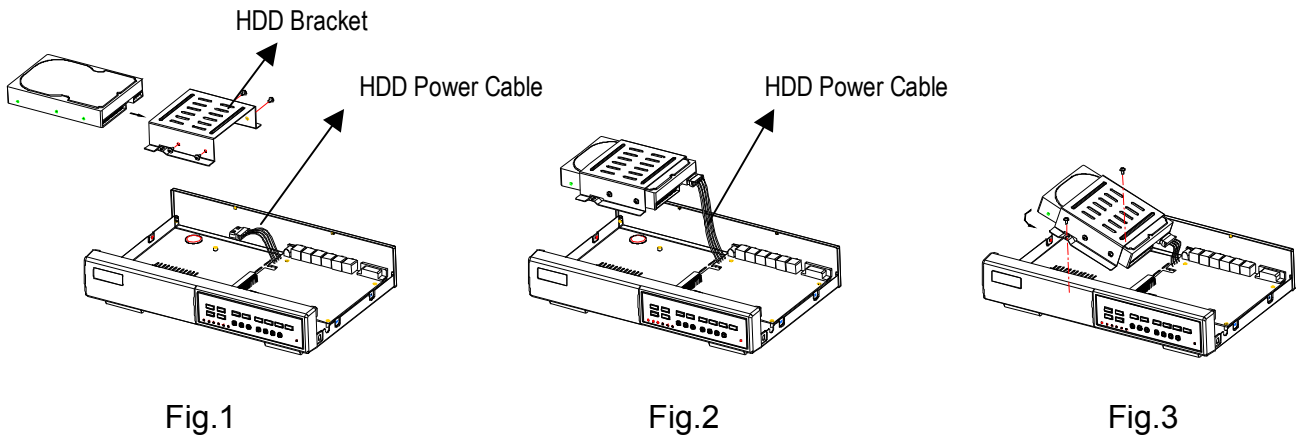

Step 1 Remove the lid and unscrew the screws from HDD bracket module .

Step 2 Insert the HDD into the HDD bracket and screw the four screws.
The bottom side is power side as chart shows (refer to the Fig 1).

Step 3 Connect the HDD power cable to the HDD (refer to the Fig. 2).

Step 4 Attach the HDD connector to the 40-pin pinhead, and screw the HDD and the DVS machine together (refer to the Fig. 3).

Step 5 Pull the sides of the lid apart slightly and push the lid down.

Note: Do not try to retrieve the HDD data by PC. The video file cannot be read by PC, operation on PC would damage the FAT table of the hard disk.

APPENDIX #2 – REPLACE THE HDD

Follow these steps carefully in order to ensure correct installation.

Step 1 Remove the lid.

Step 2 Unscrew the screws and take out the HDD from DVS machine carefully (refer to the Fig 3).

Step 3 Remove the HDD power cable from the HDD (refer to the Fig. 2).


Step 4 Unscrew the four screws connected the hard drive to the bracket and remove the HDD bracket module. Repeat those steps according to the “Install the HDD” section for resetting another HDD (refer to the Fig 1).

Step 5 Pull the sides of the lid apart slightly and push the lid down.


Note: When HDD works for a period of time, the surface temperature will be high, please notice it.

APPENDIX #3 – PIN CONFIGURATIONS

15 pin com port

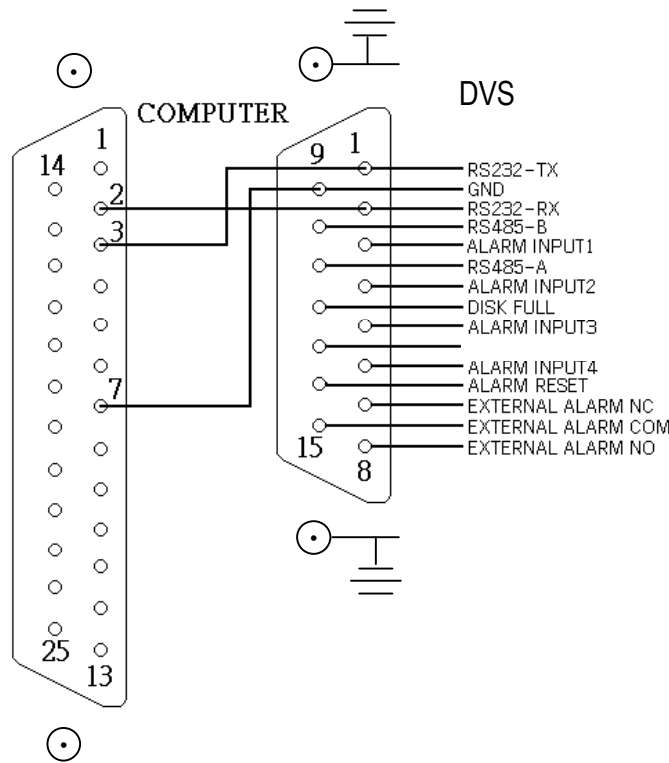

9 pin com port

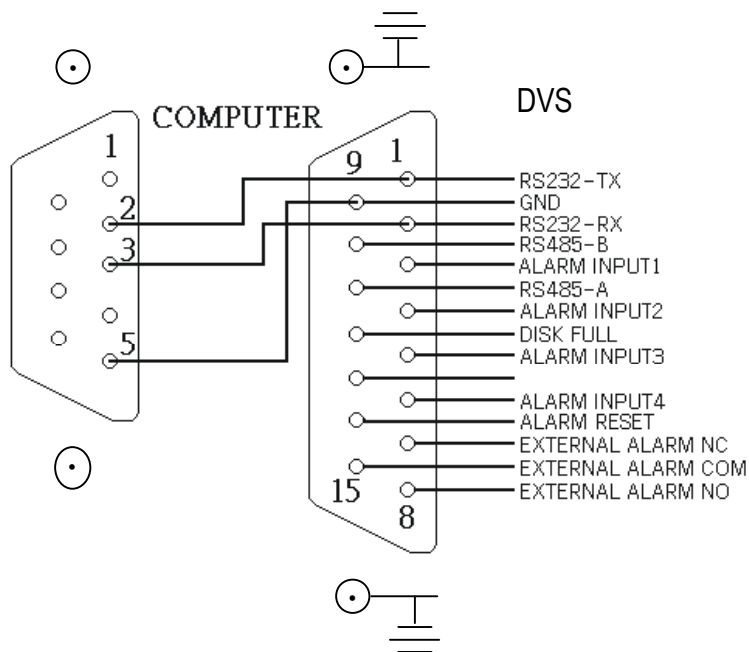

PIN 1. RS232-TX : RS-232

DVS can be controlled remotely by an external device or control system, such as a control keyboard, using RS-232 serial communications signals.

PIN 2. RS232-RX : RS-232

DVS can be controlled remotely by an external device or control system, such as a control keyboard, using RS-232 serial communications signals.

PIN 3, 4, 5, 6 ALARM INPUT

To connect wire from **ALARM INPUT (PIN 3, 4, 5, 6)** to **GND (PIN 9)** connector, DVS will start recording and buzzer will be on. When alarm has been triggered, signal becomes “Low”, and it will stop all alarm activities. Under normal operation, signal remains “High”.

PIN 7. EXTERNAL ALARM NC

Under normal operation COM connect with NC and disconnect with NO. But when alarm triggered, COM disconnect with NC, and connect with NO.

PIN 8. EXTERNAL ALARM NO

Under normal operation, COM will disconnect from NO. But when Alarm triggered, COM will connect with NO.

PIN 9. GND

GROUND

PIN 10. RS485-B

DVS can be controlled remotely by an external device or control system, such as a control keyboard, using RS485 serial communications signals.

PIN 11. RS485-A

DVS can be controlled remotely by an external device or control system, such as a control keyboard, using RS485 serial communications signals.

PIN 12. DISK FULL (OUTPUT)

When HDD is full, it sends a signal to trigger next DVS record mode, if you install another DVS. Under normal operation, the signal remains “High”. But when disk full, DVS will send the “Low” signal.

PIN 14. ALARM RESET (INPUT)

To connect wire from **ALARM RESET (PIN 14)** to **GND (PIN 9)** connector, it can disable ALARM. An external signal to **ALARM RESET (PIN 14)** can be used to reset both **ALARM OUTPUT** signal and DVS's internal buzzer. When alarm has been triggered, signal becomes “Low”, and it will stop all alarm activities. Under normal operation, signal remains “High”.

PIN 15. EXTERNAL ALARM COM

Under normal operation COM connect with NC and disconnect with NO. But when alarm triggered, COM disconnect with NC, and connect with NO.

APPENDIX #4 – RECORDING SPEED

The Record Time is different based on Recording Speed, Recording Quality and Recording Mode. Please refer to following table. The HDD capability is 250GB.

NTSC SYSTEM

IPS		30	15	8	4	2	1
MULTI LEX	Best	50hr	100hr	187hr	375hr	750hr	1500hr
	High	62hr	125hr	235hr	468hr	937hr	1875hr
	Normal	100hr	200hr	375hr	750hr	1500hr	2998hr
	Basic	167hr	333hr	625hr	1250hr	2498hr	4996hr
QUAD- FIELD	Best	48hr	95hr	178hr	356hr	712hr	1425hr
	High	59hr	118hr	223hr	445hr	890hr	1781hr
	Normal	95hr	190hr	356hr	712hr	1425hr	2848hr
	Basic	158hr	316hr	594hr	1187hr	2373hr	4746hr
QUAD- FRAME	Best	24hr	48hr	89hr	178hr	356hr	713hr
	High	30hr	59hr	112hr	223hr	445hr	890hr
	Normal	48hr	95hr	178hr	356hr	713hr	1424hr
	Basic	79hr	158hr	297hr	594hr	1187hr	2373hr
HDD Type	250 GB						

PAL SYSTEM

IPS		25	12	6	3	2	1
MULTI LEX	Best	50hr	104hr	210hr	423hr	633hr	1266hr
	High	62hr	131hr	265hr	527hr	792hr	1583hr
	Normal	102hr	210hr	422hr	844hr	1266hr	2542hr
	Basic	168hr	350hr	704hr	1406hr	2110hr	4218hr
QUAD- FIELD	Best	48hr	98hr	200hr	400hr	600hr	1202hr
	High	58hr	124hr	251hr	500hr	752hr	1503hr
	Normal	98hr	200hr	400hr	800hr	1202hr	2414hr
	Basic	160hr	332hr	668hr	1335hr	2004hr	4005hr
QUAD- FRAME	Best	24hr	50hr	100hr	200hr	300hr	600hr
	High	30hr	62hr	125hr	250hr	376hr	751hr
	Normal	49hr	100hr	200hr	400hr	601hr	1207hr
	Basic	80hr	166hr	334hr	667hr	1002hr	2003hr
HDD Type	250 GB						

Note: Above data is obtained from actual test of recording normal TV program. (For Reference Only)

APPENDIX #5 – NETWORK APPLICATION

Video Web Server Features


- Compatible with most of CCTV Products; empower any video output device watching and controlling on the Internet or LAN
- Auto Network Reconnection (ANR)
- Upgrade firmware & AP from FTP site via Video Web Server
- Watch dog function supported
- Support Dynamic IP address
- 4 alarm inputs supported
- Duplex function, record and playback simultaneously at client site
- Auto e-mail warning system which will remind you if external alarm happened
- Intelligent non-stoppable recording function after ANR
- Multi AP screens supported
- Unique video player




Video Web Server

DVS Control

1) Connect the Sub-D plug of Video Web Server with our own brand DVS products.

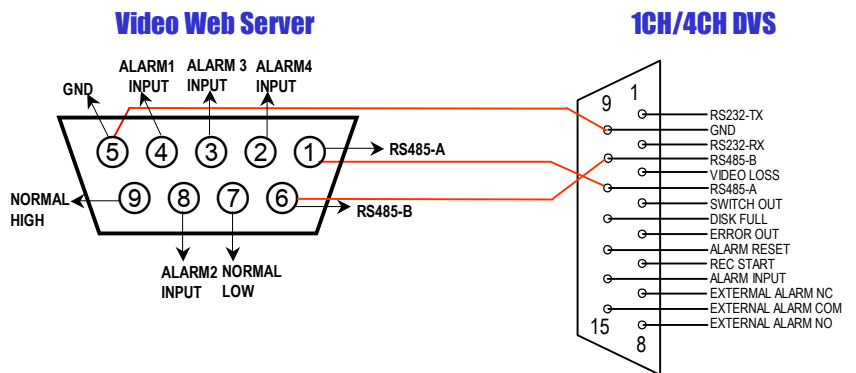

2) Set the “Remote” function in the DVS products.
NOTE : Remote mode : RS-485, Baud rate : 2400, ID : same as “I/O port setting” in the Video Web Server.

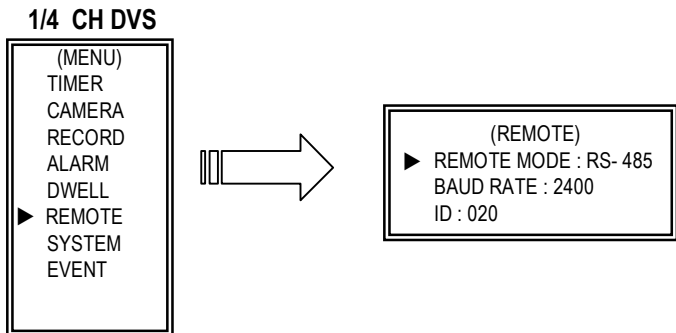

3) Set the “I/O Port Setting” in the system config of Video Web Server.
Port1 : DMR-4, Device ID : 20.

